Jomard.



Smart Conference Terminal

- Uncompressed, lossless restoration
- No driver or software setup required
- No latency, 28G/s bandwidth
- Interference-free wireless point-to-point transmission

Easy Share series

EST-W4K-A8M

EST-W4K-A8P



Low latency high bandwidth



Wireless 4K screen sharing



transmission



Plug and play



Omnidirectional microphone amplification







Easy&PRO meeting

All-in-one conference terminal for easy, professional, and simple hybrid meetings

Easy Share series conference terminal enables easy interaction across various meeting and video conferencing platforms. For users, these simple operations offer a streamlined experience, professional quality, and high compatibility.



Effortless

Simply connect a full-function Type-C cable to your laptop and start the meeting.



Professional

Type-C interface supports $4 \text{K@} 30 \text{Hz}{\,}^{\textcircled{\scriptsize 1}}$ audio and video wireless sharing, $90 \text{W}{\,}^{\textcircled{\scriptsize 2}} \text{power and networking.}$



Efficient

With Host functionality, it supports wired audio/video sharing and USB 3.2 ${\rm Gen1}^{\textcircled{3}}$ expansion.



Pure

Array omnidirectional microphone with noise reduction and echo cancellation algorithm, enhancing the immersive conference sound.





Built-in professionally tuned omnidirectional microphone amplification

Clear and natural communication between participants is ensured through full-range speakers, echo cancellation, background noise reduction, and professional algorithm-based array omnidirectional microphones.

Eight-in-one professional expansion interface

High-speed network interface with PD-powered Type-C, USB-A, HDMI input/output, and 3.5mm audio interface to enhance connection of various peripherals in meetings.



Plug and play Simple yet professional

Highly compatible cross-platform design

Uses Type-C and HDMI for input signals, no need to consider operating systems or software/network support, plug and play.

Wide adaptability, user-friendly

No software or network support required, easily integrates into your existing system.

Compact size with enhanced expansion

No longer restricted to dedicated spaces and complex device connections. Minimal operations and multiple interfaces make sharing easy and flexible.


Easy Share series wireless conference terminal is a powerful conference support product, capable of handling audio, video, and peripheral connections without the need for network or software support. It can integrate with various operating systems and conferencing platforms.









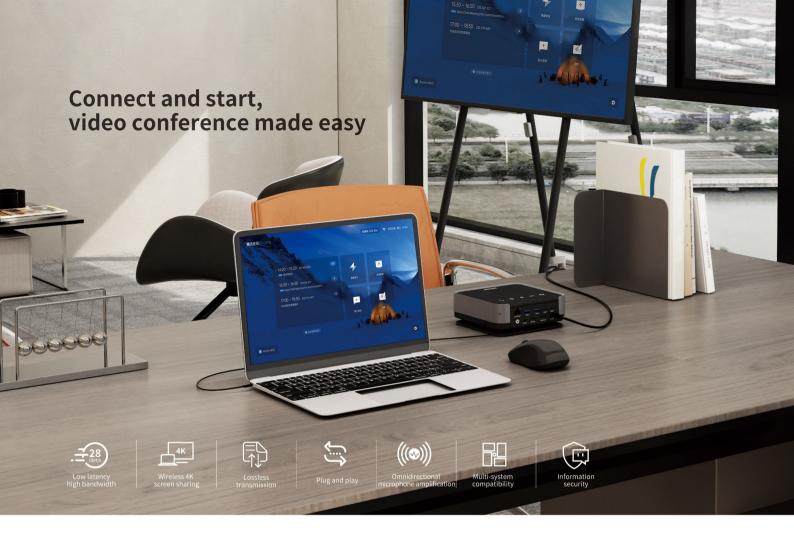

Easy Share series EST-W4K-A8M

Simply connect the Type-C cable to the terminal to start your meeting. The laptop screen automatically connects to the receiver, and you can select the terminal's microphone and speakers for a professional, efficient video conference!



Safe, high-speed 4K wireless sharing

Wireless sharing up to 4K30Hz with millimeter-wave high-speed security technology, no delay, anti-interference, no software or network required.



Built-in professional omnidirectional microphone amplification

Echo cancellation and effective noise reduction, with a 4-array omnidirectional microphone and enhanced human voice speakers, make the meeting sound immersive.




Eight-in-one multi-port expansion

Provides HD audio/video input/output, high-speed USB connection, PD power supply, high-speed network, and independent audio output.



Note: EST-W4K-A8 does not feature integrated omnidirectional microphone amplification compared to EST-W4K-A8M.

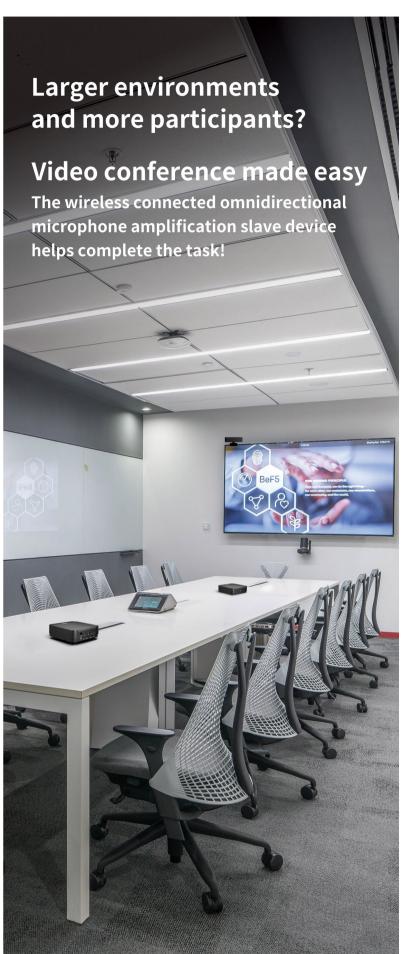

Easy Share series EST-W4K-A8P

Simply connect the Type-C cable to the terminal to start your meeting. The laptop screen automatically connects to the receiver, and you can select the terminal's microphone and speakers for a professional, efficient video conference!



Low latency high bandwidth



Wireless 4K





Multi-system



Omnidirectional compatibility microphone amplification



Plug and play

Information



cascading



Safe, high-speed 4K wireless sharing

Wireless sharing up to 4K30Hz with millimeter-wave high-speed security technology, no delay, anti-interference, no software or network required.

Built-in professional omnidirectional microphone amplification

Echo cancellation and effective noise reduction, with a 4-array omnidirectional microphone and enhanced human voice speakers, make the meeting sound immersive.

Professional omnidirectional microphone amplification wireless

Same quality professional algorithm, with a 4-array omnidirectional microphone and enhanced human voice speakers in the slave device, wirelessly connects to the host for clear amplification and accurate pickup in larger venues.

Eight-in-one multi-port expansion

Provides HD audio/video input/output, high-speed USB connection, PD power supply, high-speed network, and independent audio output.



Easy Share series



Function	Specifications	Parameters	EST-W4K-A8	EST-W4K-A8M	EST-W4K-A8P
wireless transmission	Transmission mode Transmission distance Transmission rate Video output Audio output Storage temperature Operating temperature Storage humidity Operating humidity System compatibility Software compatibility	Millimeter wave 60Ghz wireless frequency band 20m 3.96Gbps Point-to-point latency:≤3ms 4K@30Hz(downward compatible)① 3.5mm AUX. HDMI -10°C ~ +45°C 0°C ~ +50°C 0 to 90% relative humidity, without condensation 0 to 85% relative humidity, without condensation Windows 11/10/Mac OS/iOS/ Android QQ/WeChat/DingTalk/Tencent/Google Meet/ Teams/ Zoom/Skype	Yes	Yes	Yes
Microphone	Frequency Qty Type	100Hz-8KHz 4 MEMS microphones for 360-degree pickup Electret	_	Pickup range ≤3m	Supports wireless cascading Pickup range≪6m
Speaker	Qty Power consumption Type Output Frequency response range	1 3W Neodymium magnet 85 dB SPL @ 1 Meter F0-20KHz	_	Sound amplification range≤25㎡	Supports wireless cascading Sound amplification range≤50㎡
Expansion	Network interface×1 USB-A interface×2 USB-C interface×2 HDMI Input interface×1 HDMI Output interface×1 USB-C cable×1	Gigabit adaptive wired network Function expansion, power supply BC1.2 7.5W Function expansion, power supply BC1.2 7.5W, PD20W3.2Gen1③ Supports 4K@30Hz (downward compatible) Supports 4K@30Hz (downward compatible) , Supports simultaneous wireless transmission and display Supports PD15W-90Woutput, network signal output, data exchange, and supports audio and video signal input②			
host	Product size Power supply Power consumption Net weight	162×162×58mm 20V····9A 20W (excluding peripherals) 700g			
Receiver	Power consumption Interface	5V ··· 2A USB-C、HDMI			

Specifications may change with product optimization and design; subject to the physical product.